

Switches

Electronic Key Tag


Electronic Key Tag operates electronic main switches. It controls all electrical devices in a hotel room, except those which must stay 'ON' permanently. Control is affected through specific card.

Technical Specifications

- Supply Voltage: 160-264V~ 50Hz
- Relay rating 25A
- · Front LED that indicates supply status to the equipment and load
- Switches off load on removal of card after an exit delay of 30 secs.


Note: For higher loads like air conditioners, geysers etc. an electromagnetic relay / Solid State Relay (SSR) may be used.

Different Stages of Operation




A) Insert the card to activate the load B) Card insert






C) Remove the card: the load remains active for about 30s

Wiring Diagram

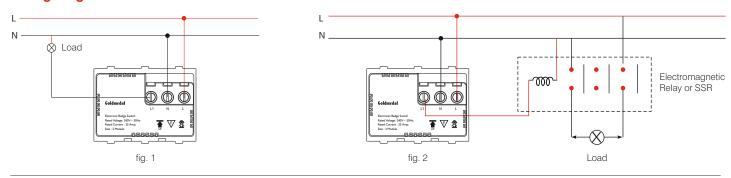

Dimensions (mm) Side view shows overall dimensions & flush depth.

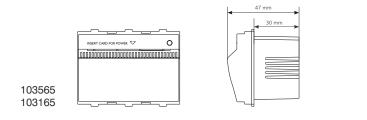

Warranty

All electronic devices are warranted against manufacturing defects for two years from the date of purchase. In the event of defects, Goldmedal will repair or, at its discretion, replace the warranted product if delivered to a Goldmedal authorized dealer along with a duly stamped guarantee card or sales receipt that shows the date of purchase along with the serial no. of the product. This warranty excludes defects due to abnormal load, abuse, or failure to use the product in accordance with the Instructions. Goldmedal shall not be liable for any other damages, whether incidental, consequential or otherwise.

♥ 8 ♠ ₹& □ ੈ

GOLDMEDAL ELECTRICALS PVT. LTD.

Bldg. No. 2, Shripal Industrial Estate, Valliv Road, Vasai East, Thane - 401208, Maharashtra, India. For more details, email us at info@goldmedalindia.com www.goldmedalindia.com





